



Rec'd PCT/PTO 04 JAN 2005  
GB/03/2896

GB 03/02 836

INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

2/3

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 21 AUG 2003

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

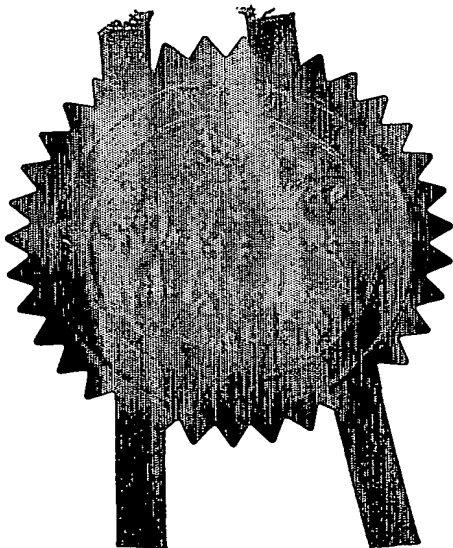


Signed

*[Handwritten signature]*

Dated 11 August 2003

**BEST AVAILABLE COPY**

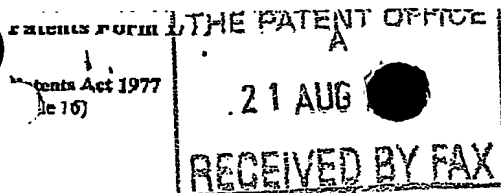

The  
**Patent  
Office**

177

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference				P303374GB-1/PMJF			
2. Patent application number (The Patent Office will fill in this part)				0219487.6		21AUG02 E742730-1 D02837 P01/7700 0.00-0219487.6 21 AUG 2002	
3. Full name, address and postcode of the or of each applicant (underline all surnames)				They Limited EsgairGoch Pennal Machynlleth Gwynedd SY20 9JS  Patents ADP number (if you know it) 84176 8500  If the applicant is a corporate body, give the country/state of its incorporation United Kingdom			
4. Title of the invention				A Dispenser			
5. Name of your agent (if you have one) "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)				WITHERS & ROGERS Goldings House 2 Hays Lane London SE1 2HW  Patents ADP number (if you know it) 1776001			
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number				Country	Priority application number (if you know it)	Date of filing (day / month / year)	
				UK	0215442.5	4/7/02	
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application				Number of earlier application		Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (answer "Yes" if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))				YES			

## Patents Form 1/77

Enter the number of sheets for each of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 13

Claim(s) 4

Abstract

Drawing (s) 14

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

WJR

Date

21/8/02.

12. Name and daytime telephone number of person to contact in the United Kingdom

Paul Foot

0121 245 3900

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

P303374GB-1

## A Dispenser

The present invention relates to a dispenser. More particularly, the present invention relates to a dispenser for selectively dispensing material into a container.

5

It is known to sell pre-mixed alcoholic and non-alcoholic beverages. Examples of such beverages include pre-mixed gin and tonic, whisky and cola, rum and fruit juice, rum and cola, mineral water and fruit cordial as well as milkshakes and "smoothies". However, in some instances the taste of such pre-mixed drinks may degrade if left on the shelf for an extended period prior to consumption. In other instances the mixed components may react together such that the mixture may no longer be drinkable or effective if not consumed almost immediately. An example of such a mixture would be that of water and an effervescent indigestion or cold remedy.

10

Whilst the aforementioned problems may be overcome by keeping the two components separate until consumption of a mixture comprising both components is desired, it is often inconvenient to store and carry both components separately prior to mixing. Furthermore, the act of mixing the components may lead to spillage, contamination and additional inconvenience to the consumer.

20

The present invention seeks to overcome, or at least mitigate, the problems of the prior art.

25

Accordingly one aspect of the present invention provides a dispenser comprising attachment means for attachment to a container, a reservoir for holding material, a barrier means to prevent the material entering the container, wherein the barrier means is removable by manipulation of the dispenser, thereby permitting the material to be selectively dispensed into the container.

30

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings in which:

FIGURE 1 is a perspective view of a dispenser according to one embodiment of the  
5 present invention fitted to a container;

FIGURE 2 is a plan view of the dispenser of Figure 1 in a closed condition;

FIGURE 3 is a plan view of the dispenser of Figure 1 in an open condition;  
10

FIGURE 4 is a cross-sectional view through the dispenser of Figure 2 along the axis  
X-X;

FIGURE 5 is a cross-sectional view through the dispenser of Figure 3 along the axis  
15 Y-Y;

FIGURE 6 is an axial cross-sectional view through a dispenser according to a second  
embodiment of the present invention in a closed condition;

FIGURE 7 is an axial cross-sectional view through the dispenser of Figure 6 in an open  
20 condition;

FIGURE 8 is an axial cross-sectional view through a dispenser according to a third  
embodiment of the present invention in a closed condition;  
25

FIGURE 9 is an axial cross-sectional view through a dispenser according a fourth  
embodiment of the present invention in a closed condition;

FIGURE 10 is an axial cross-sectional view through the dispenser of Figure 9 in an  
30 open condition;

FIGURE 11 is an axial cross-sectional view through a dispenser according to a fifth embodiment of the present invention in a closed condition;

FIGURE 12 is an axial cross-sectional view through the dispenser of Figure 11 in an  
5 open condition;

FIGURE 13 is an exploded cross-sectional view through a dispenser according to a sixth embodiment of the present invention;

10 FIGURE 14 is a cross-sectional view through a dispenser according to a seventh embodiment of the present invention; and

FIGURE 15 is a cross-sectional view through a dispenser according to an eighth embodiment of the present invention.

15

Referring to Figure 1, a dispenser indicated generally at 10 according to one embodiment of the present invention is a screw fitted to a container 12, such as a bottle, jar or the like.

20 The dispenser comprises a first upper portion indicated generally at 14 and a second lower portion indicated generally at 16. It can be seen that both the first and second portions 14 and 16 are generally cylindrical in shape, being mounted about a common axis 15, with the upper portion being closed off to define a reservoir 22 containing a liquid 20. It can be seen that in this embodiment the major part of the first portion 14 is  
25 formed from transparent material 18 (eg transparent plastics) with the remainder having a textured or knurled first engagement portion 24 to assist a user in gripping the first portion 14. In other classes of embodiment, the reservoir may be entirely opaque, entirely transparent, entirely translucent, and/or the engagement portion 14 may be increased in size. A similar textured surface 26 is provided on the second portion 16.  
30 Examples of suitable materials from which the dispenser may be made include polyethylene terephthalate (PET) and polypropylene.

The first and second portions 14 and 16 are arranged so as to permit relative rotational movement therebetween to occur about their common axis 15. However, as shown in Figure 1, a tear-off band 28 frangibly connects the first and second portion 14 and 16 and preferably acts to both reduce the risk of accidental relative rotation occurring and to indicate whether the dispenser has been tampered with or used. The band 28 is provided with a projecting portion 30 that enables a user of the dispenser to grasp the band and remove it, as is well known. In other embodiments, the band 28 may be replaced by a direct frangible connection between the portions 14 and 16. A further frangible connection (not shown) may be provided between the dispenser 10 and the container 12 for similar reasons.

Referring now to Figures 2 and 4 which respectively illustrate plan and cross-sectional views through the dispenser 10 when in a closed condition, it can be seen that the first portion 14 additionally comprises a first wall 32 having, in this embodiment, two through holes 34 provided therein in an opposed radially equidistant position relative to the axis 15. The position, number and size of the hole(s) 34 may be adjusted as required in other embodiments.

It can be seen that the first wall 32 is, in this embodiment, formed integrally with the first engagement portion 24, and furthermore that the intersection of the lower wall 32 and engagement portion 24 defines an annular undercut 36 to facilitate the engagement of the first portion 14 with a co-operating toothed ring 38 of the second portion 16.

The second portion 16 comprises a second wall 40 formed integrally with the second engagement portion 26. A toothed ring 38 extends upwardly from wall 40, the teeth 39 of which are arranged to engage with undercuts 36 of the first portion. The toothed ring 38 may be continuous or may have gaps therein to allow the teeth to flex more easily and thereby ease the assembly process. It is however preferable that at least a leg portion 48 of the ring 38 is continuous to improve the seal between the first and second portions 14 and 16.

The second wall 40 is provided with two through holes 42 radially equidistant from the axis 15 with respect to the through holes 34 of wall 32. The second wall 40 is in a face contacting relationship with first wall 32. However, in the position shown in Figure 2 holes 42 are circumferentially offset from holes 34 by approximately 90 degrees. The combination of the face contacting relationship of walls 32 and 40 and offset of the holes 34 and 42 means that there is no path for the liquid 20 to pass through the walls, which together define a barrier means.

It can be seen that the second engagement portion 26 is provided with threads 44 on its radially inner face to engage with co-operating threads 46 on the container. It will be appreciated that in alternative classes of embodiment, the second portion 16 may be provided with any suitable alternative means of engagement with the container 12 such as a simple frictional push fit, clip fitting or a frangible connection.

Turning now to Figures 3 and 5 the dispenser 10 is shown in an open or operative position. A user of the dispenser has removed band 28 and turned the first portion 14 in a clockwise direction A through substantially 90 degrees about axis 15 with respect to the second portion 16. A detent or stop (not shown) may be provided at a suitable position on either the first or second portions 14 and 16 to limit the extent of rotation possible. In other embodiments, the first portion 14 may be capable of being turned anticlockwise only, or both clockwise and anticlockwise.

It can be seen that this rotation aligns through holes 34 in wall 32 with the corresponding through holes 42 in wall 40. This enables the liquid 20 in the reservoir 22 to pass through the holes 34 and 40 in a direction B into the container to which the dispenser 10 is attached. Thereafter, the user may shake the container to ensure a thorough mixing of the liquid 20 with liquid (not shown) held within the container 12 is achieved, before grasping portion 26 and unscrewing the dispenser 10 to enable the mixed contents of container 12 to be consumed or used. In some classes of embodiment, rather than removing the entire dispenser 10, it may be possible to detach the first portion 14 from the second portion 16 to enable the contents in container 12 to be poured out through holes 42.



In other classes of embodiment, rotation of the first portion with respect to the second portion may allow material to pass through the barrier means by use of alternative mechanisms to that described above. For example, a ramp or thread may be provided on one of the first or second portions with a complementary formation being provided on the other portion or a separate insert, so as to translate relative rotation between the portions into a relative axial motion thereby removing a plug or the like in a wall constituting the barrier means.

Turning now to a second embodiment of the present invention as illustrated in Figures 6 and 7, like numerals have, wherever possible, been used for like parts of the dispenser with the addition of the prefix "1". Only the differences of the second embodiment with respect to the first embodiment are discussed in further detail.

It can be seen that the dispenser 110 according to the second embodiment of the present invention again comprises first and second portions 114 and 116. First and second walls 132 and 140 are again provided on the first and second portions 114 and 116 respectively. Walls 132 and 140 again define a barrier means between the reservoir 122 and the container. The walls 132 and 140 are inclined to form a frusto-conical or funnel-like shape.

A hole 134 is provided at the centre of wall 132 and has a cylindrical extension 150 extending downwardly therefrom terminating at a pointed circular tip 152. The tip 152 is arranged so as to contact a correspondingly dimensioned disc 154 positioned at the centre of wall 140. The periphery of the disc 154 is preferably weakened (eg by thinning the material at the interface between the funnel portion and the disc 154). To improve the seal between the tip 152 and its point of contact with the disc 154, this region may be provided with suitable sealing material (eg an elastomeric material such as synthetic rubber).

30

The first portion 114 and second portion 116 engage together by means of a radially outwardly projecting lip or rim 156 of the second portion co-operating with a radially

inwardly directing lip or rim 158 of the first portion 114. A recessed cylindrical region 160 of the second portion is provided beneath rim 156 to enable the first portion 114 to slide downwardly with respect to the second portion 116. The extent of sliding movement is restricted by an annular stop surface 162 provided at the lower extent of the recessed region 160.

To dispense liquid 120 from the reservoir 122 into the container 112 a user removes band 128 that hitherto substantially prevented vertical sliding movement, before pushing downwardly on the first portion 114. This downward pressure causes the tip 152 to detach the majority of disc 154 from the remainder of wall 140 whilst preferably enabling the disc to remain connected to a part of the wall (so that it does not fall into the container). Once the disc 154 is displaced, the liquid 120 flows in a direction C from reservoir 122 into container 112. The funnel shape of wall 132 ensures that substantially all of the liquid is dispensed into the container 112. As in the first embodiment the mixture of liquids in container 112 may then be poured out of the container once the dispenser 110 has been unscrewed therefrom.

Referring to Figure 8 which illustrates a third embodiment of the present invention, like parts have been indicated by like numerals with the addition of the prefix "2". It can be seen that the dispenser 210 of the third embodiment operates using a similar principle to the dispenser 110 of the second embodiment. However, in this embodiment the second wall 240 of the second portion 216 merely acts to suspend one or more piercing tip(s) 252 to pierce the first wall 232 of the first portion 214, the wall 232 in this embodiment being in the form of a piercable plastics membrane. Wall 240 need not therefore be in the form of an uninterrupted surface to act as a seal, rather it merely needs to be sufficiently strong to be able to support the tip 252 during the piercing operation. Thus, in this embodiment only wall 232 acts as the barrier means. Note that extension 250 is not in the form of an uninterrupted cylinder. Instead, notches 253 are provided therein.

To dispense the liquid 220, the user removes band 128 and presses downwardly on the first portion 214 in a similar manner to the second embodiment, thus bringing wall 232

into contact with the tip 252 of hole 234. This downward movement causes the wall 232 to be pierced, thus forming a hole or holes in wall 232 through which the liquid 220 may be dispensed into the container 212. Notches 253 ensure that substantially all of the liquid 220 may be easily dispensed and may also act to ease the piercing operation.

A fourth embodiment of the present invention is shown in Figures 9 and 10 in which like parts are again, wherever possible, designated by like numerals with the addition of the prefix "3". In this embodiment, walls 332 and 340 are again provided with two holes 334 and two holes 342 respectively that are offset with relation to each other in a similar manner to the arrangement shown in Figure 2. As in the first embodiment, when the dispenser is in a closed condition, wall 332 is in a face contacting relationship with wall 340, thus preventing liquid 320 flowing from the reservoir 322 into the container 312.

To remove the barrier means created by walls 332 and 340, a user lifts the first portion 314 with respect to the second portion 316. The extent of this movement is limited by engagement of radially outwardly directed lip or rim 358 of the first portion 314 engaging with a corresponding radially inwardly directed lip or rim 356 of the second portion 316. This axial movement of the first portion 314 away from the second portion 316 creates a chamber 370 between the first wall 332 and the second wall 340. The liquid 320 is able to flow into chamber 370 through holes 334 and then out of the chamber through the holes 342 in wall 340, the direction of flow being shown by arrows D. Once the liquid has been dispensed into the container 312, the dispenser 310 may be removed by unscrewing it from the container as in the previous embodiments.

In alternative classes of embodiment, a vertical guide formation may be provided between the first portion 314 and second portion 316 that only permits axial movement of the first portion relative to the second portion to occur.

Figure 11 illustrates a fifth embodiment of the present invention, which is essentially a variant of the dispenser 310 of the fourth embodiment shown in Figures 9 and 10. Like

parts have been denoted as far as possible by like numerals with the addition of the prefix "4". Only differences with respect to the dispenser of the fourth embodiment are described below.

- 5 Material is dispensed from reservoir 422 into container 412 in the same manner as the fourth embodiment (by lifting first portion 414 with respect to second portion 416). However, the dispenser 410 is provided with a tubular conduit 475 extending through the dispenser from top to bottom to enable the contents of the container 412 to be poured or consumed without the necessity of removing the dispenser from the  
10 container.

- To substantially prevent the contents of the container 412 leaking through the conduit 475, a valve means in the form of a plug 476 is provided at the base thereof arranged to seal an aperture 484 in the base of a sleeve-like extension 482 of wall 440. The  
15 sleeve-like extension 482 extends into reservoir 422 and is arranged so as to provide a slidable but sealing fit around conduit 475.

- The base of conduit 475 tapers inwardly towards plug 476, and holes 480 are provided in the conduit to permit the contents of the container 412 to flow therethrough when the  
20 plug is removed from aperture 484.

- At its upper end, conduit 475 extends beyond the top of reservoir 422 to provide a convenient drinking or pouring spout. The top of the conduit 475 is preferably closable to minimise the risk of contaminants entering it. In this embodiment a known "sports  
25 cap" type closure arrangement 485 is provided. The top of the conduit 475 has a centrally mounted plug 472 standing proud therefrom, the plug being mounted via arms 479 so as to provide apertures 478 through which the contents of the container 412 may pass.

- 30 An axially slidable cap 486 of the arrangement 485 encloses and seals the end of the conduit 475, with the upward axial motion being restricted by radially inward facing lip 490 of the cap contacting radially outward facing lip 474 provided on the conduit. In

the closed position shown in Figure 11, plug 472 seals a correspondingly sized hole 488 provided in the cap. In alternative classes of embodiment any other suitable form of closure for the conduit 475 may be provided such as a screw or snap-fit cap (not shown). Alternatively, a non-reclosable seal may be provided, such as a peel-off or puncturable membrane, or no seal at all may be provided.

Referring to Figure 12, the contents of the reservoir 422 are dispensed into the container in a similar manner to the fourth embodiment. The relative axial movement between portions 414 and 416 also removes plug 476 from hole 484, meaning that once the contents of reservoir 422 have been dispensed into the container, the mixed material may then be consumed or poured via the conduit 475 once the cap 485 is opened. Both cap 485 and plug 476 may be reclosed at any time, meaning that a partially full container 412 may be safely stored between uses. Note that conduit 475 prevents the material 420 in the reservoir 422 being directly poured or consumed via sports cap arrangement 485; the material must first be mixed with the contents of container 412.

Figure 13 illustrates a variant of the fifth embodiment of the present invention in which like numerals designate like parts with the addition of the prefix "5". Only those differences with respect to the fifth embodiment are discussed in detail. A cap equivalent to cap 486 is not shown in Figure 13, but would be provided to close the top of conduit 575.

In this sixth embodiment, the entire first portion is transparent and radially inwardly directed teeth 556 of the second portion 516 are arranged so as to engage a complementary lip 558 of the first portion so as to permit relative rotational movement between portions 514 and 516, but prevent relative axial movement.

In addition, an alternative form of valve means is provided and comprises holes 584b and 584a provided respectively in the conduit 575 and sleeve-like extension 582. In the closed position, the holes are offset to prevent the passage of the contents of the container therethrough, but once rotated into the open position are aligned to allow the mixed contents of the container to pass therethrough. To assist a user of the dispenser

in turning the dispenser from a closed to an open position and back, a tooth or projection 576 is provided on the conduit 575. In the closed position this engages with hole 584a, and in the open position with a recess 577 provided on sleeve-like portion 582, which is 180° out of alignment with hole 584a. This arrangement provides the user with a positive indication of when the dispenser is in the open or closed position. In other embodiments, the positions of the projection 576 and hole 577 on the conduit and sleeve-like portion may be reversed.

Figure 14 shows a seventh embodiment of the present invention in which like parts are designated by like numerals with the addition of the prefix "6". Again, only differences with respect to the preceding embodiments are discussed in detail.

In this embodiment the plug 676 is directly connected to the cap 686 by one or more connecting bars 692. The bars extend through apertures 678 between arms 679 that support plug 688.

Thus, when cap 686 is lifted to the position shown in broken lines in Figure 14, plug 676 is lifted clear of hole 684. A user then waits until the contents of reservoir 622 are dispensed into container 612 before then pouring or consuming the mixed contents of the container via the reservoir and cap 686.

In a variant of this embodiment of the present invention, plug 684 may be connected to a user engageable portion of the dispenser 610 through which the container contents may not be poured. Instead, the dispenser may be removed from the container as in embodiments one to four described above to allow pouring.

Figure 15 illustrates an eighth embodiment of the present invention in which like parts have been designated where possible by like numerals with the addition of the prefix "7". This embodiment shows a dispenser of the type disclosed in the fourth embodiment to which a sports cap assembly 785 has been mounted. The material 720 is dispensed from the reservoir 722 into the container 712 in the same way as in the

fourth embodiment. The mixed contents of the container 712 may then be poured or consumed via the reservoir 722 and sports cap assembly 785.

It will be appreciated by those skilled in the art that any suitable combination of means  
5 for dispensing material from the reservoir into the container may be combined with any  
suitable means for then removing the contents of the container without having to detach  
the dispenser from the container that either employ a conduit or not. It will also be  
appreciated that in those embodiments that employ a conduit, other types of seals at the  
base of the conduit may be used, such as a membrane that may be pierced by suitable  
10 piercing means due to manipulation of the dispenser by a user. Alternatively, if an  
appropriate seal (such as a sports cap) is provided at the top of the conduit, a seal may  
be omitted from the bottom of the conduit.

It will further be appreciated that the dispensers described above all offer a more  
15 convenient way of storing to materials or substances that require subsequent mixing,  
and that the dispensers then enable mixing to be achieved substantially without risk of  
contamination or spillage occurring in a user friendly-manner.

It should be appreciated that terms such as "upwardly", "downwardly", "top" and  
20 "bottom" used herein are for ease of reference only, and that such terms should not be  
construed to be limiting.

It will be further appreciated that numerous changes may be made within the scope of  
the present invention. For example, the second wall may be provided over the mouth of  
25 the container rather than on the second portion. The dispenser may be adapted so as to  
provide a positive pressure to the material during dispensing or to permit the relative  
pressures of the reservoir and container to be substantially equalised prior to dispensing  
eg by having means to enable pressure in the container to be vented prior to or during  
dispensing. A scale may be provided on the reservoir to enable the amount of material  
30 being dispensed to be measured out and the barrier means reclosed. Any suitable  
arrangement for piercing the first or second wall may be used. As an alternative to  
piercing, a reclosable valve may be opened or depressed by manipulation of the

dispenser. The dispenser may be non circular in shape and may be adapted to dispense solids such as powders and tablets (eg by providing larger and/or a greater number of holes), and gases (by providing a gas tight seal in the barrier means) into a container in addition to liquids as described above. It is envisaged that the third embodiment  
5 illustrated in Figure 8 would be particularly suited to this purpose. More than one reservoir may be provided in the dispenser, so that a user may select, for example, a particular compound or flavour to be added to a drink or other material held in a container from two or more different compounds or flavours held in the dispenser. The multiple reservoirs may be arranged such that the contents thereof can only be  
10 dispensed into the container in a particular sequence to ensure that, for example, a chemical reaction within the container occurs in a predetermined manner.

As well as being used in relation to alcoholic and non alcoholic drinks, the dispenser may be used in numerous other applications. For example, the dispenser may be used  
15 to add herbs, spices or other flavourings to a "cook-in" sauce or ready meal provided in the container, dispensing fruits or other flavourings into yoghurts, as well as in numerous other food and beverage related applications. The dispenser may also be used for biological and chemical applications (such as testing kits) in which a reactive compound could be dispensed from the dispenser into a container without the risk of  
20 spillage or contamination, as well as for cosmetics and health and beauty products such as shampoos and conditioners. The dispenser may further have applications in household and vehicle related products (eg the dispensing of two-stroke oil into petroleum), and in pharmaceutical or medical products.



## Claims

1. A dispenser comprising attachment means for attachment to a container, a  
5 reservoir for holding material, a barrier means to prevent the material entering the  
container, wherein the barrier means is removable by manipulation of the dispenser,  
thereby permitting the material to be selectively dispensed into the container.
- 2 A dispenser according to claim 1 wherein closure means is provided in the  
10 dispenser to permit material to be removed from a container to which the dispenser  
may be attached via the dispenser without the need to remove the dispenser from the  
container.
- 3 A dispenser according to claim 2 wherein a conduit extending through the  
15 dispenser permits the removal of material from the container whilst bypassing the  
reservoir.
- 4 A dispenser or container assembly according to claim 2 wherein the dispenser  
is arranged so as to permit the removal of material via the reservoir.
- 20 5. A dispenser according to any one of claims 2 to 4 wherein the closure means is  
arranged such that manipulation thereof further causes the material to be selectively  
dispensed.
- 25 6. A dispenser according to any one of claims 2 to 5 wherein the closure means is  
reclosable.
7. A dispenser according to claim 6 wherein the closure means is a sports cap.
- 30 8 A dispenser according to any preceding claim wherein the dispenser further  
comprises means to substantially equalise the pressure in the reservoir or to supply a  
positive pressure relative to a container to which the dispenser is attachable.

9 A dispenser according to any preceding claim comprising a first portion and a second portion.

5 10 A dispenser according to claim 9 wherein the first portion comprises the reservoir.

11 A dispenser according to claim 9 or claim 10, wherein the second portion comprises the attachment means.

10

12 A dispenser according to any one of claims 9 to 11, wherein at least one of the first and second portions are arranged so as to be movable by manipulation of the dispenser from a first closed position in which the barrier means is in place to a second open position in which the barrier means is removed.

15

13 A dispenser according to claim 12, wherein the movement from the first position to the second position is a vertical or an axial movement.

20

14 A dispenser according to claim 13, wherein the vertical or axial movement is a movement of the first portion away from the second portion.

15 A dispenser according to claim 14, wherein the barrier means comprises a plug, the plug being arranged to block a hole in the first position and to be lifted clear of the hole in the second position.

25

16 A dispenser according to claim 14, wherein the barrier means comprises a first wall provided on the first portion and a second wall provided on the second portion, the first wall being provided with a first through hole and the second portion being provided with a second through hole, the holes being out of register, the first wall being in face contacting relationship with the second hole in the first position and out of face contacting relationship in the second position.

30

17 A dispenser according to claim 12, wherein an angular relationship between the first portion and the second portion provides the barrier means.

18 A dispenser according to claim 17, wherein a first wall is provided with a first  
5 through hole and a second wall is provided with a second through hole.

19 A dispenser according to claim 18, wherein the movement from the first to the second position is a rotational movement.

10 20 A dispenser according to claim 17 wherein means is provided in the dispenser to convert angular movement between the first portion and the second portion into a vertical or axial movement so as to remove the barrier means.

21 A dispenser according to any one of claims 1 to 12, wherein a first wall  
15 comprises the barrier means.

22 A dispenser according to claim 21, wherein the first wall is frangible or piercable to permit the selective dispensing of the material.

20 23 A dispenser according to claim 22, wherein piercing means is provided on the first portion.

24 A dispenser according to claim 22, wherein piercing means is provided on the second portion.

25

25 A dispenser according to claim 22, wherein the first wall is provided on the second portion.

30 26 A dispenser according to claim 22, wherein piercing means is provided on the first portion.

27 A dispenser according to claim 24 or claim 26, wherein the piercing means is associated with a through hole.

28 A container assembly comprising a container and a dispenser according to any one of claims 1 to 11, wherein a first wall is secured to the container proximate a mouth or opening of the container.

29 A container assembly according to claim 28 wherein the dispenser is provided with piercing means to pierce the first wall.

30 A container assembly according to claim 28 wherein a second wall is provided on the dispenser.

31 A container assembly according to claim 30 wherein the spatial relationship between a first wall and a second wall provides the barrier means.

32 A dispenser according to any one of claims 22 to 27, or a container assembly according to claim 19, wherein relative movement between the first portion and the second portion enables the first wall to be pierced.

33 A dispenser or a container assembly according to any preceding claim comprising a scale provided on the reservoir to enable a predetermined amount of material to be dispensed.

34 A container assembly comprising a container and a dispenser according to any one of claims 1 to 27 or 32.

35 A dispenser or container assembly substantially as hereinbefore described.

36 A dispenser or container assembly substantially as hereinbefore described with reference to, or as illustrated by, Figures 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, or 14 of the drawings



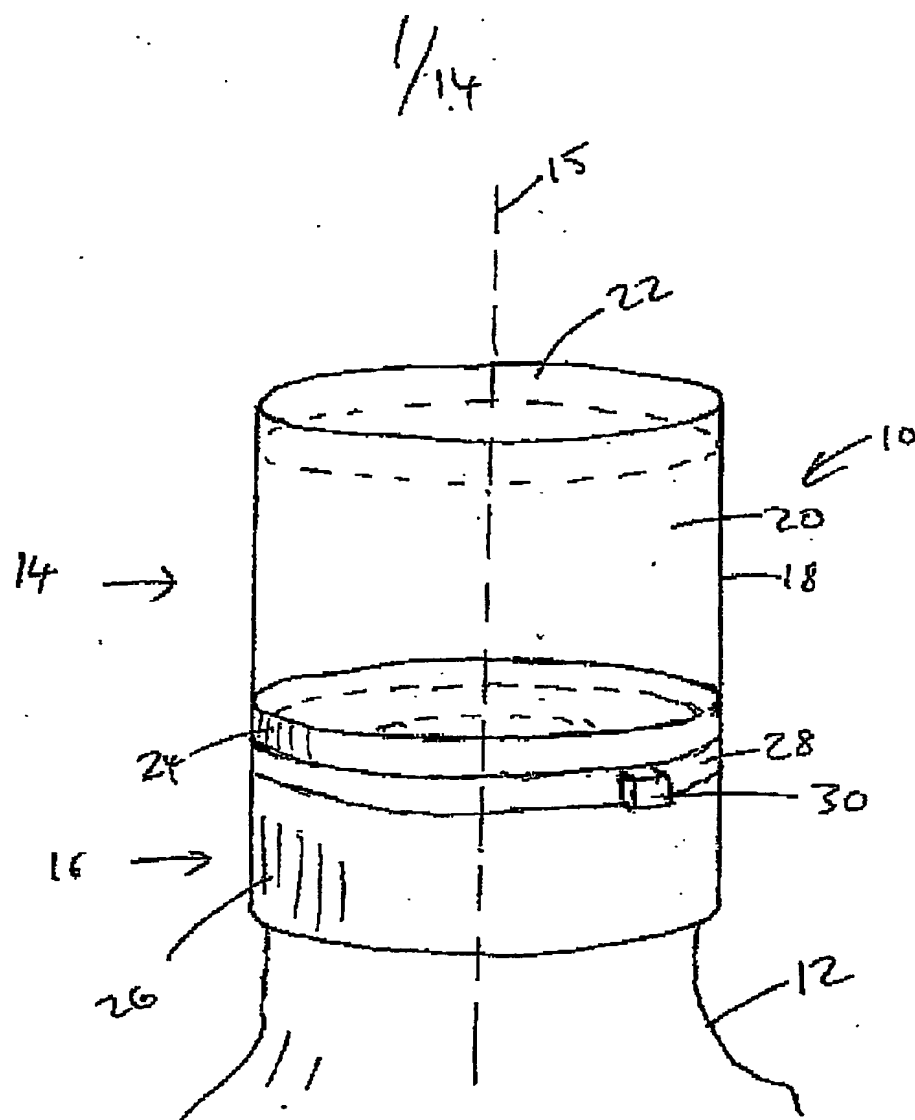


FIG 1.

2/14

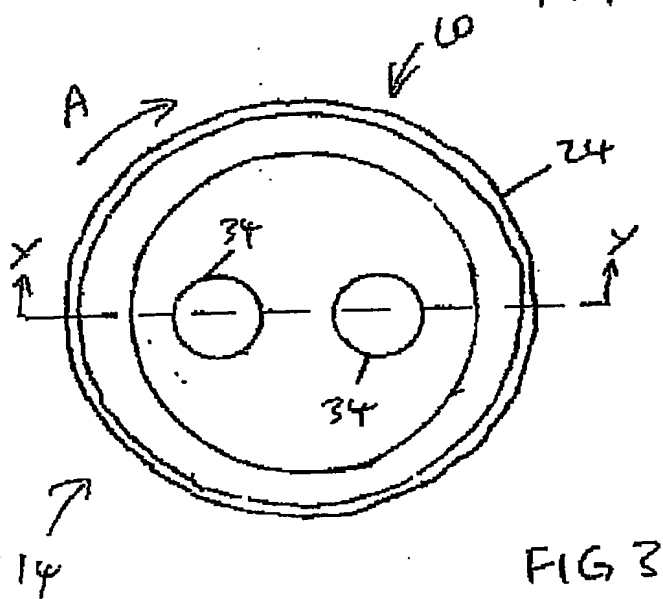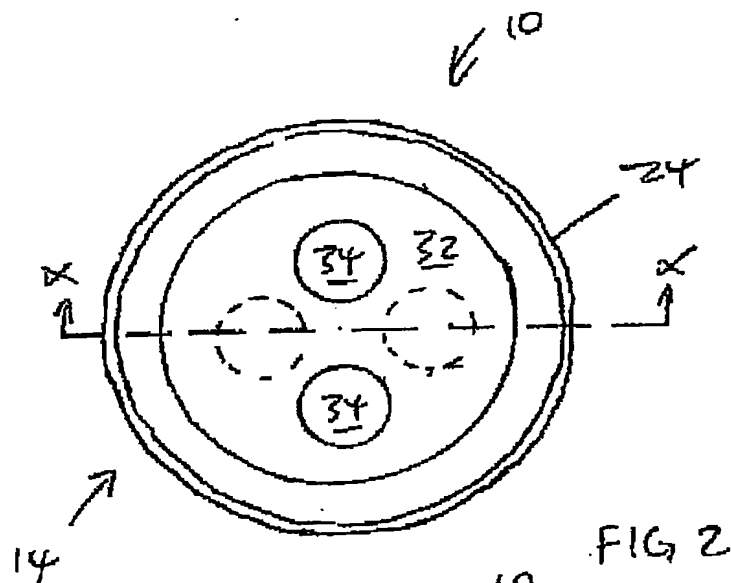

3/14

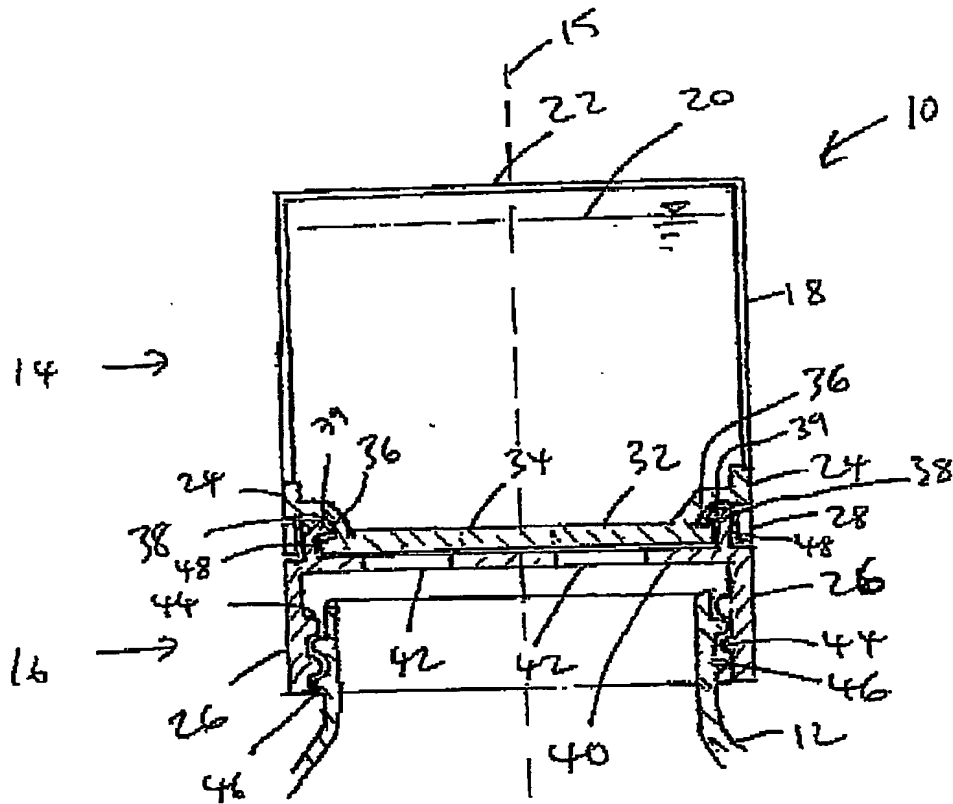


FIG 4

4/14

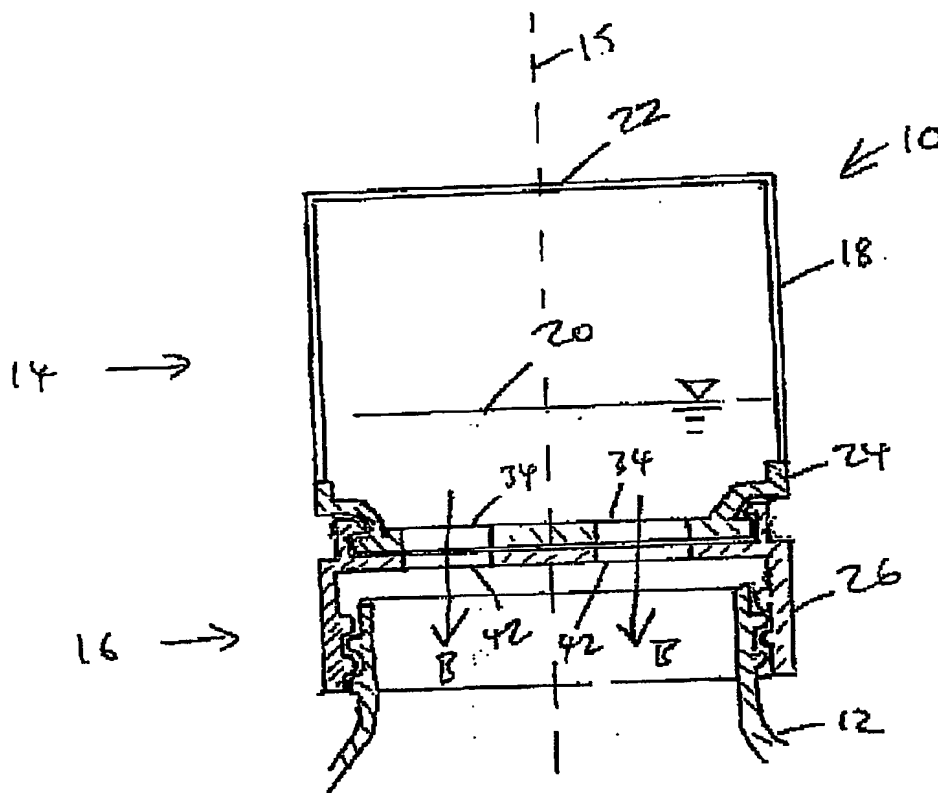


FIG. 5



5/14

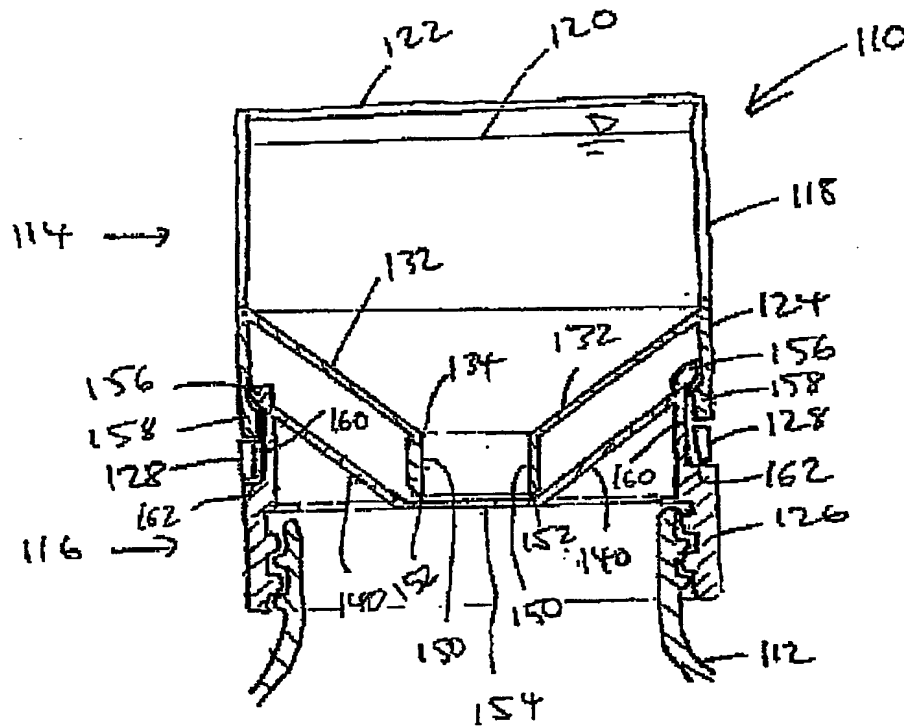


FIG 6

6/14

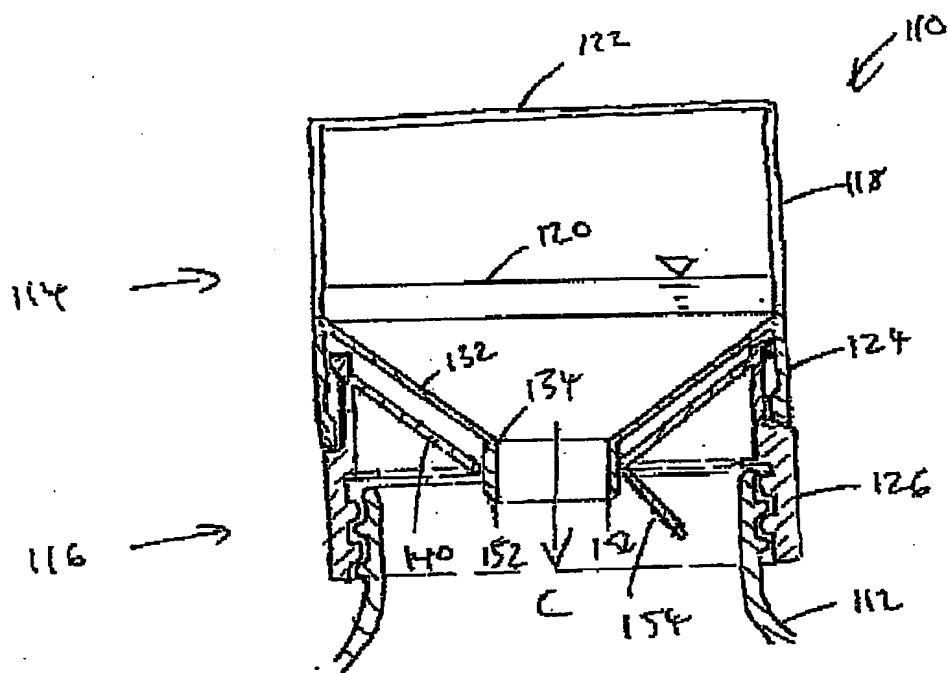


FIG 7

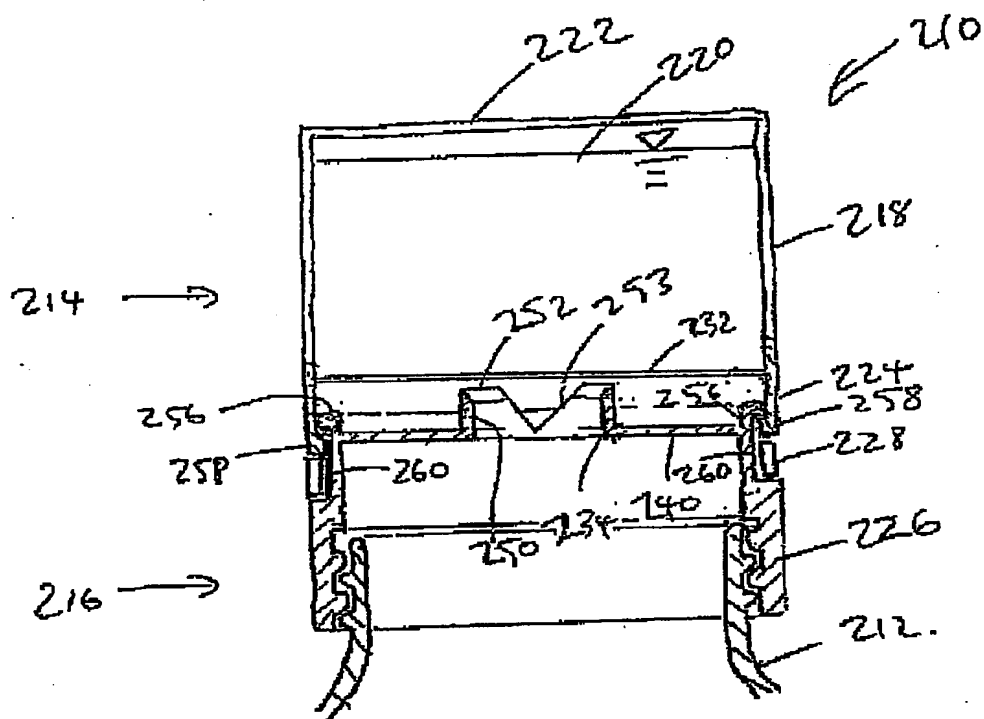


FIG 9

8/14

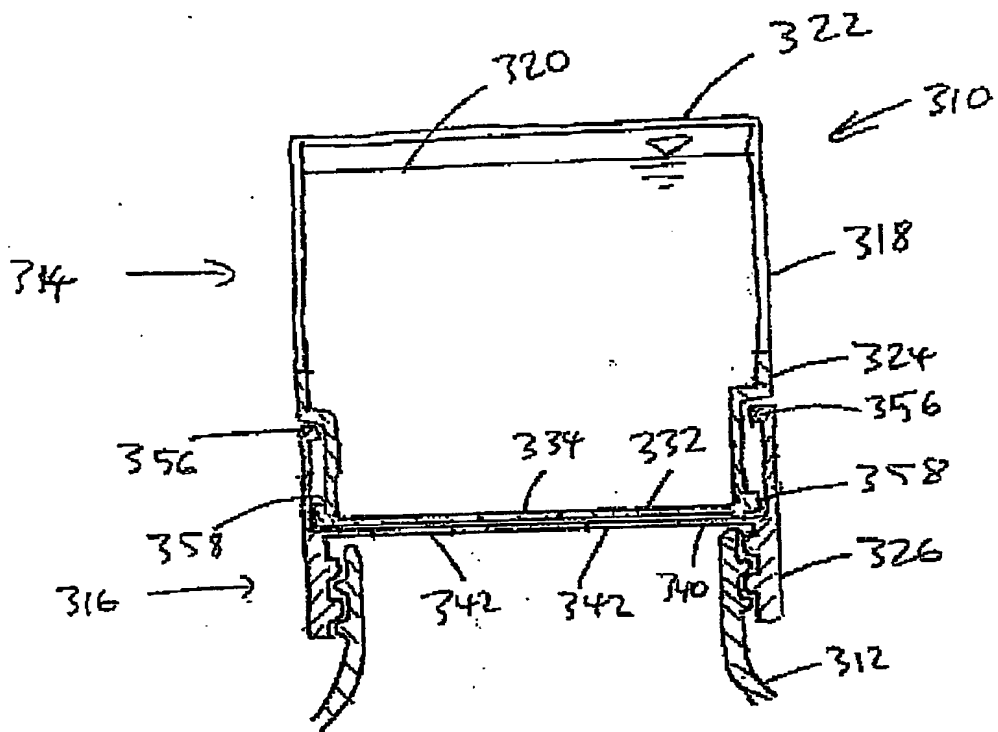


FIG 9

9/14

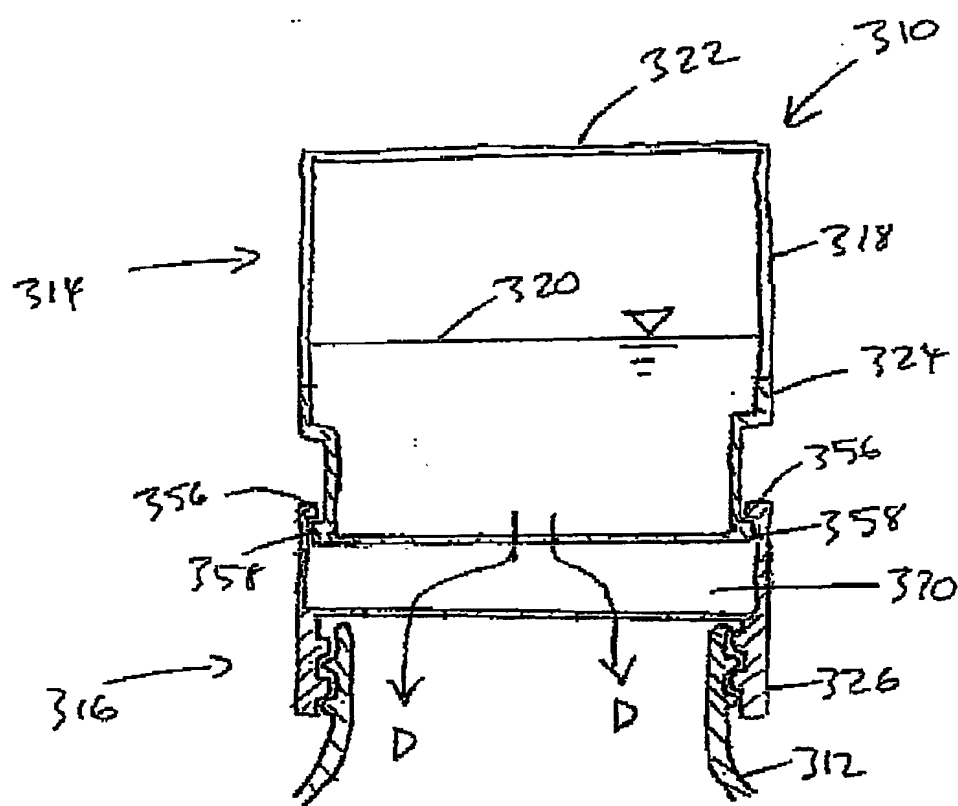


FIG 10



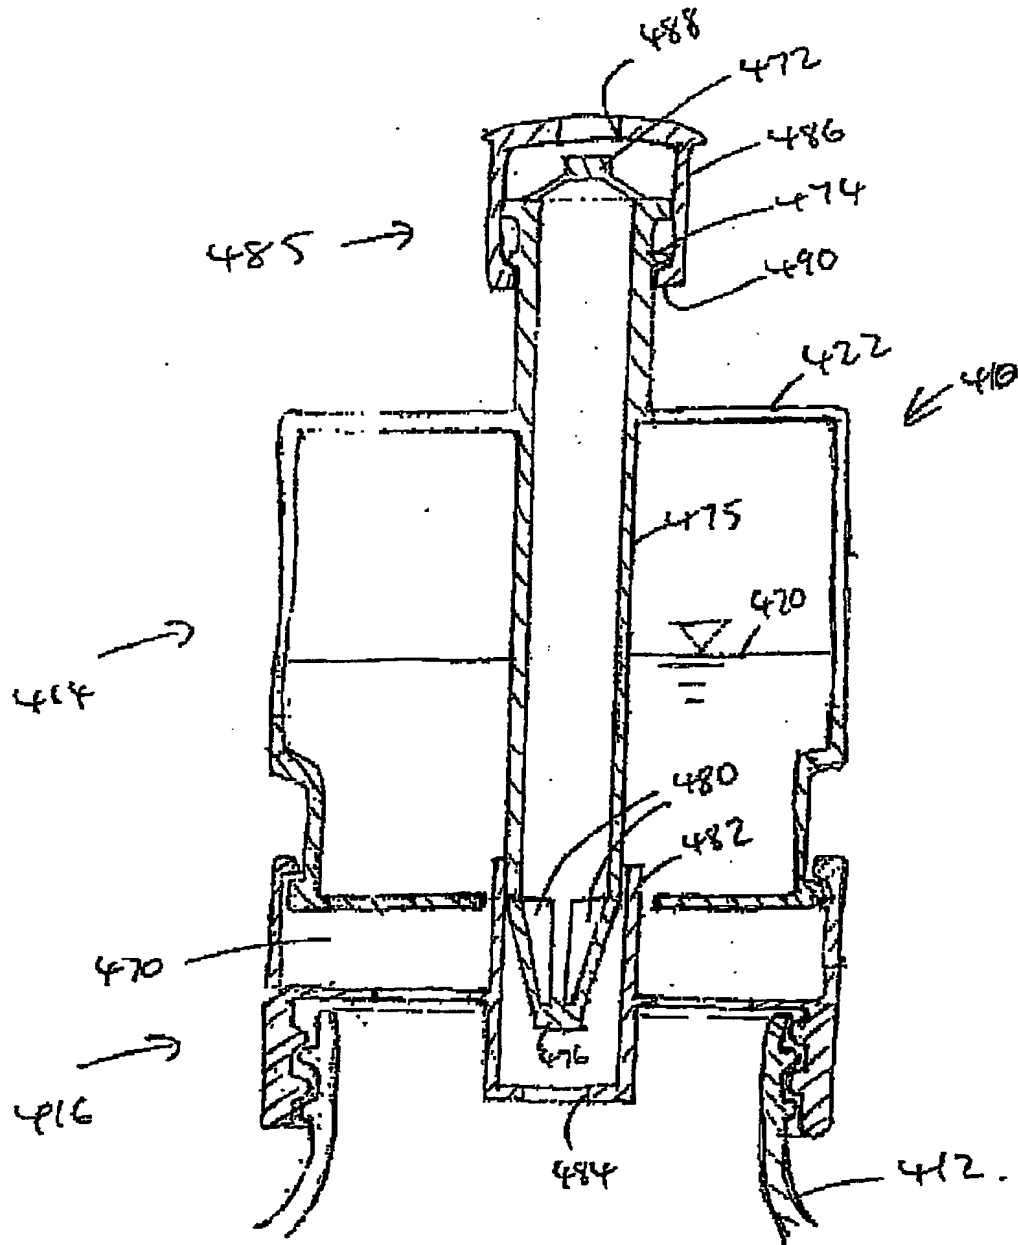
11  
114

FIG. 12





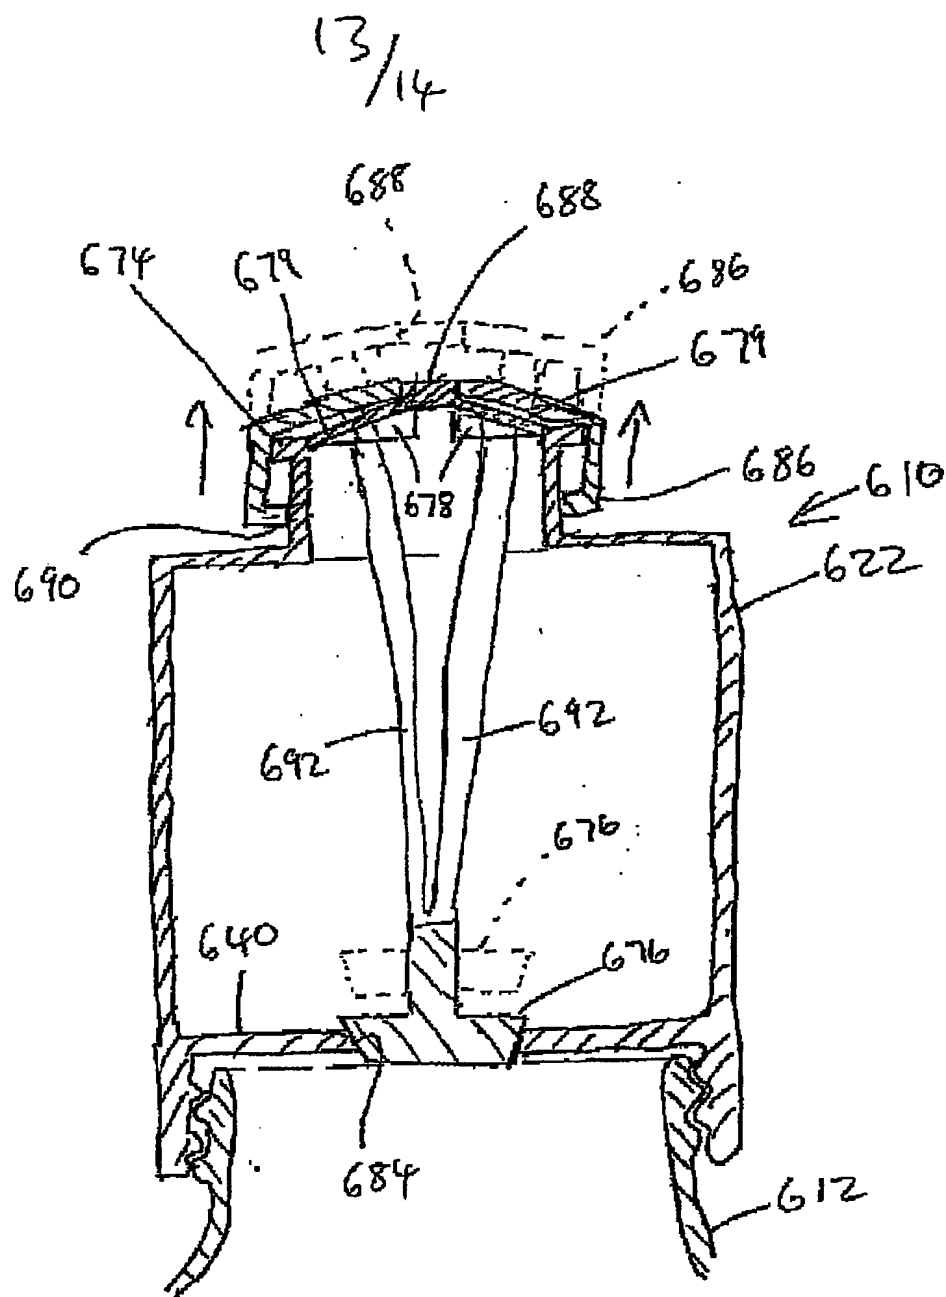


FIG. 14

14/14

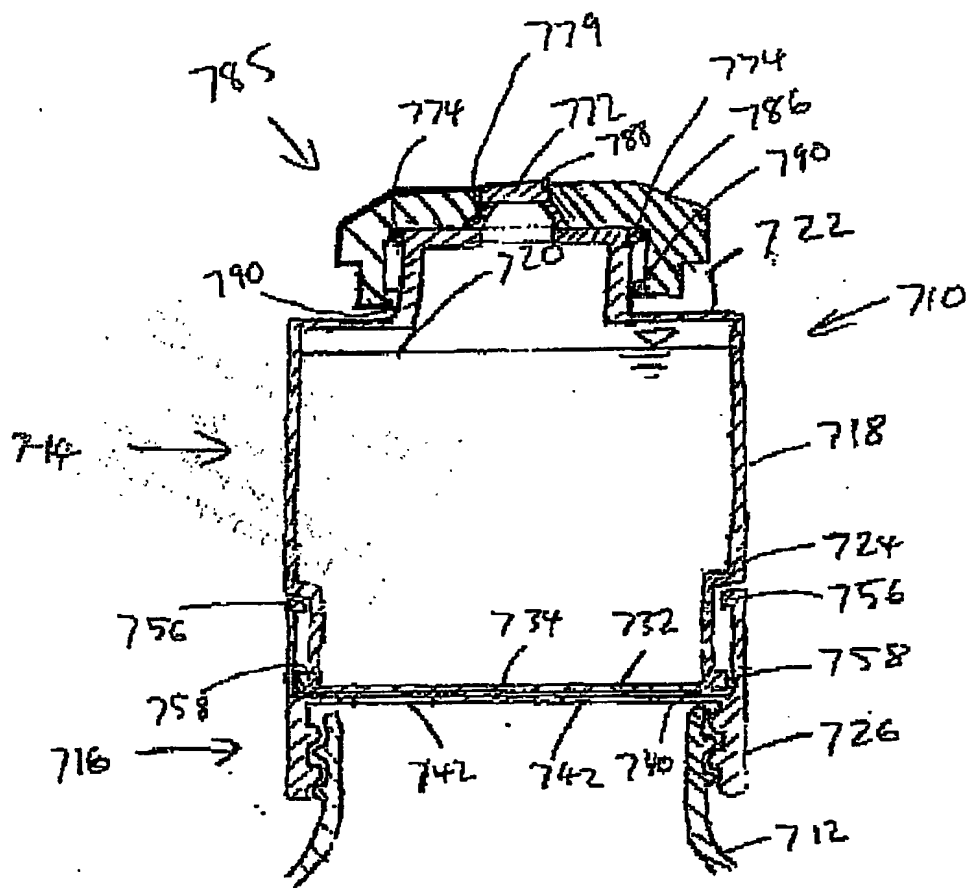


FIG 15

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**